

9035E SPECIFICATIONS >>>

ENGINE	
Make	Yanmar
Model	3TNV88-BPLY
Power	28.4 hp (21.2 kW) @ 2,400 rpm
Peak Torque	107 N·m @ 1,440 rpm
Number of Cylinders	3
Displacement	1.6 L

HYDRAULIC SYSTEM	
Main Pump Type	Variable Displacement Piston Pump
Main Pumps Total Flow	99 L/min
Relief Pressure, Main	24.5 MPa
Pilot Circuit	3.9 MPa

SWING SYSTEM	
Swing Speed	10 rpm
Swing Motor	Axial Piston Motor


DRIVE SYSTEM	
Maximum Travel Speed (high/low)	4.2/2.5 km/h
Drawbar Pull	33 kN

UNDERCARRIAGE	
Track Shoe Width	300 mm
Number of Shoes per Side	45
Number of Bottom Rollers per Side	4
Number of Upper Rollers per Side	1

OPERATING WEIGHT	
Operating Weight (Cabin)	3,980 kg
Operating Weight (Canopy)	3,860 kg

SERVICE CAPACITIES	
Fuel Tank	40 L
Engine Oil	7 L
Cooling System	7 L
Hydraulic Reservoir	58 L

ELECTRICAL SYSTEM	
Voltage	12 V

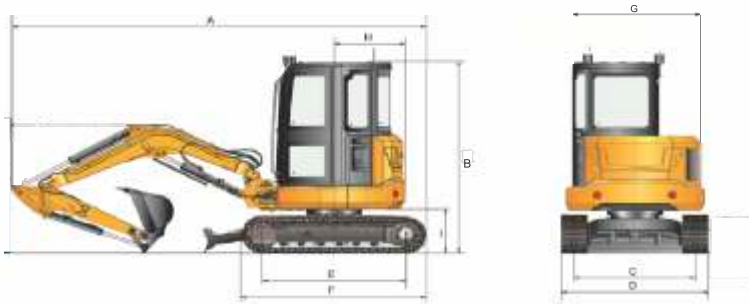


WORKING RANGE	
Boom Length	2,450 mm
Arm Length	1,320 mm
A Maximum Digging Radius	5,385 mm
B Maximum Ground Digging Radius	5,270 mm
C Maximum Digging Depth	3,085 mm
D Maximum Digging Depth, 2.44 m (8') level	2,610 mm
E Maximum Vertical Digging Depth	2,503 mm
F Maximum Cutting Height	4,710 mm
G Maximum Dumping Height	3,310 mm
H Minimum Front Swing Radius	2,416 mm
Blade Up	370 mm
Blade Down	390 mm
Blade Width	1,700 mm
Blade Height	343 mm
Maximum Bucket Digging Force (ISO)	30 kN
Maximum Arm Digging Force (ISO)	22 kN

DIMENSIONS	
A Overall Length	4,810 mm
B Overall Height (Cabin)	2,500 mm
B Overall Height (Canopy)	2,581 mm
C Track Gauge	1,400 mm
D Undercarriage Width	1,700 mm
E Track on Ground	1,675 mm
F Track Length	2,100 mm
G Overall Width of Upper Structure	1,600 mm
H Tail Swing Radius	850 mm
I Counterweight Ground Clearance	580 mm

OPTIONAL

RB Kit

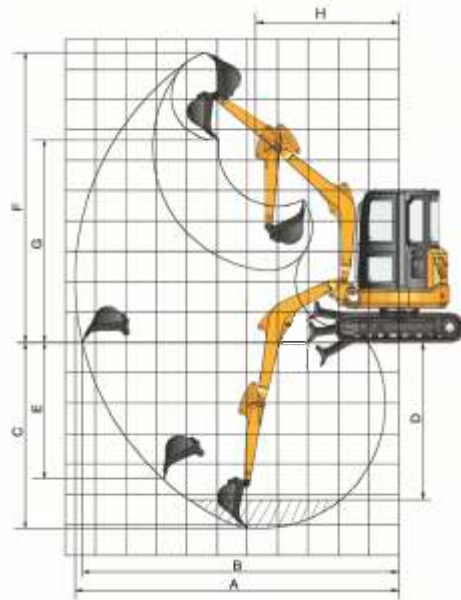

Engine	Yanmar 3TNV88-BPLY
Power	28.4 hp (21.2 kW) @ 2,400 rpm
Standard Bucket Capacity	0.11 m ³
Maximum Dig Depth	3,085 mm
Operating Weight	3,980 kg

9035E EXCAVATOR

TOUGH WORLD. TOUGH EQUIPMENT.

Corporate office
LiuGong India Pvt. Ltd.
101, Okhla Industrial Estate, Phase III
New Delhi- 110020
Tel.: 011- 47272200
www.liugong.com
india@liugong.com

Plant Address:
Plot No. 163, Industrial Area,
Sector - III, Pithampur,
Dist. - Dhar, Madhya Pradesh - 454774
Tel.: 07292-416700

LIUGONG CARE
1800 1033 852

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

11/2024 LIPL

9035E EXCAVATOR



DESIGN TO DELIVER

HIGH PERFORMANCE, EFFICIENCY, RELIABILITY,
COMFORT AND SERVICEABILITY

POWERFUL ENGINE //

The new 9035E Excavator is powered by the latest fuel efficient Yanmar engine .It has a net power rating of 28.4 hp.



LARGE BUCKET //

All sides reinforcement high strength buckets gives longer service life in tough applications.



ROBUST DOZER BLADE //

9035E has a sturdy 1.7m wider dozer blade and reinforced cylinder protection for better leveling and grading, ensuring durability and precision in construction and landscaping.



BUILT TO OUTPERFORM



CASTED BOOM PIVOT POINTS //

- Casted boom pivot points for enhanced durability and stability
- Utilization of high-quality casting materials
- Strong foundation ensuring optimal load-bearing capabilities
- Improved performance and longevity of the excavator



CABIN & CANOPY TYPE OPTION //



EASY SERVICE POINTS //

Centralized greasing simplifies lubrication with convenient points, enhancing equipment lifespan and reducing maintenance time.

The wide engine window offers easy access and visibility for quick status checks and maintenance monitoring



ZERO TAIL RADIUS //

The 9035E rotates in tracks without encroaching, ideal for confined work sites, ensuring efficiency and agility in tight spaces where traditional excavators struggle.

